

GP COMPANIES, INC.

1174 Northland Drive • Mendota Heights, MN 55120
(651) 454-6500 • FAX (651) 454-8015



June 25th, 2020

Subject: MW/MWR LP Inlet Cover Bolt Update

Effective from serial code 19177007 and on, all MW Low Pressure Pumps (MW45-50-55 (incl. "R" & "S" types) will feature M18 bolts instead of previous M16 to retain the Inlet (Suction) Cover. This improvement requires the manifold and valve cover to change; part numbers to retrofit are noted below.

If a new manifold is required on any pumps with serial code 19177007 or older, please use the conversion kit:


F2482 → Conversion Kit: Includes Manifold, Inlet Valve Cover, and M18 Bolts (QTY 8)

F73121601 → New Manifold Only (Previous PN F73120315)

F73225615 → New Inlet Valve Cover Only (Previous PN F73210815)

F99525000 → New M18 Bolts (Qty 8 Rq'd)

Tightening torque of the new M18 bolts is 490 Nm (361 ft-lbs)

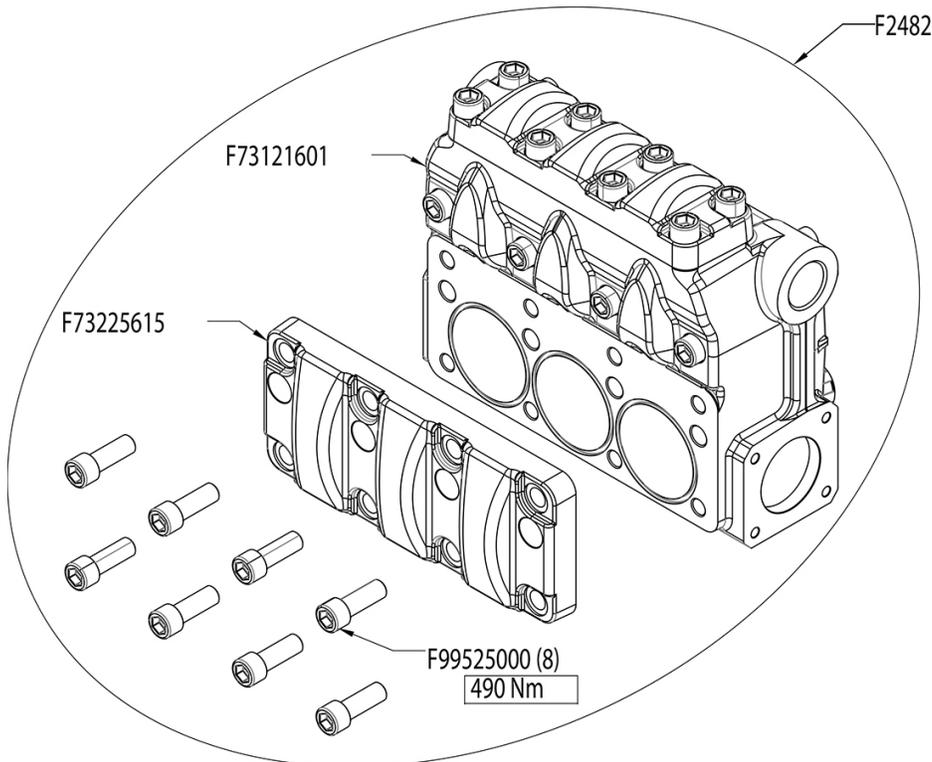

If you have any questions regarding this change or any other GP Products, please contact your sales representative or Customer Service at 1-888-474-5487 (1-888-GP4KITS).