


ZK1


from General Pump

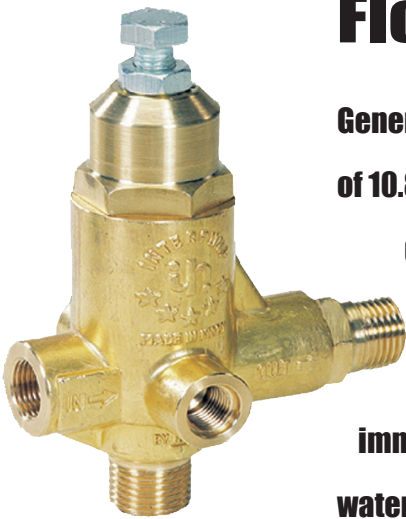

Flow Sensitive Unloader

General Pump's newest flow sensitive unloader, the ZK1, is rated for a maximum volume of 10.8 GPM and a discharge pressure of 3600 PSI. This unloader also offers a compact design and can be rebuilt from the top without disturbing surrounding plumbing. The ZK1 is a soft start unloader offering gradual pressure increases, assuring safety for the operator and the pump. With the ZK1, system pressure drops immediately to zero, reducing wear on the hose, gun, fittings and heating coils on hot water machines.

**A flow-sensitive
(or flow actuated)
unloader
is activated
by a reduction
in flow.**

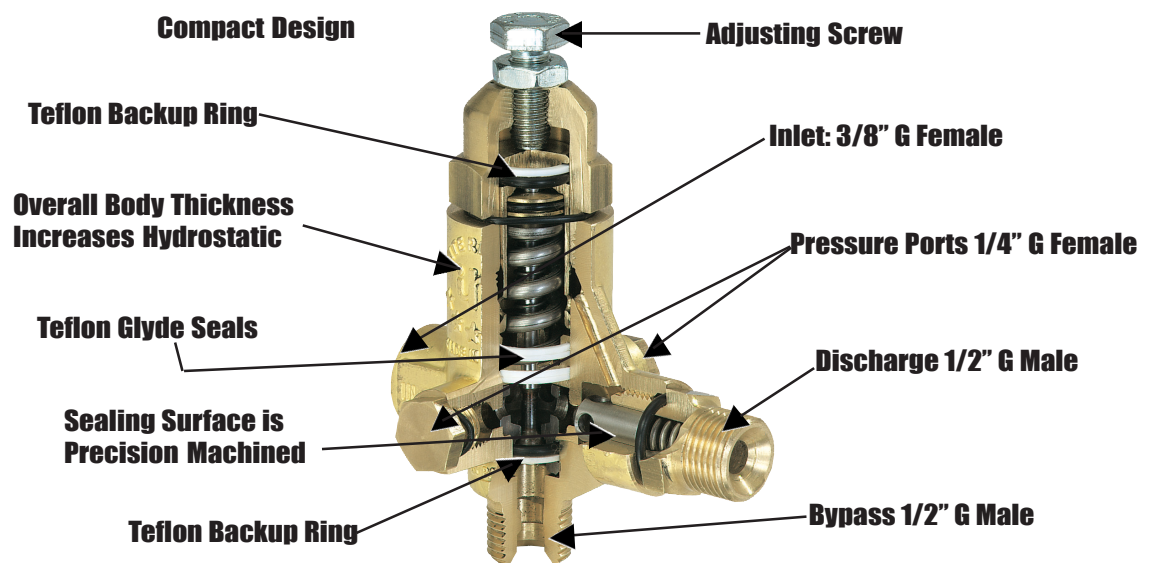

General Pump
1174 Northland Drive ★ Mendota Heights, MN 55120
888.474.5487 ★ Fax: 800.535.1745
www.generalpump.com



ZK3608

from General Pump

Trapped Pressure Unloader

The ZK3608, General Pump's latest trapped pressure unloader, is rated for a maximum flow of 8 GPM and a discharge of 3600 PSI. This unloader also offers dual bypass ports and its easy min-max settings offers maximum ease in adjustment and control. The check valve in the ZK3608 is designed for lasting performance with its heavy-duty brass body and composite valve cage. The durable valve design features Delrin backup rings, extra material thickness, precision machined surfaces and a higher hydrostatic, all of which mean longer life. Put all together, the ZK3608 is a high performing, long lasting trapped pressure unloader!



A trapped pressure


(or pressure actuated)

unloader

is activated

by an increase

in pressure.

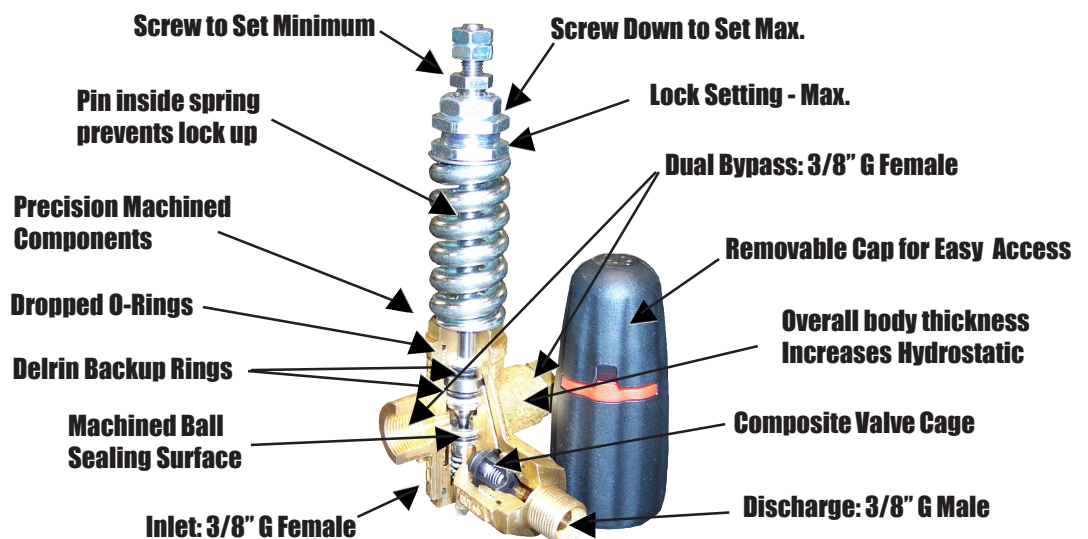

GENERAL PUMP

General Pump
1174 Northland Drive ★ Mendota Heights, MN 55120
888.474.5487 ★ Fax: 800.535.1745
www.generalpump.com



GENERAL PUMP