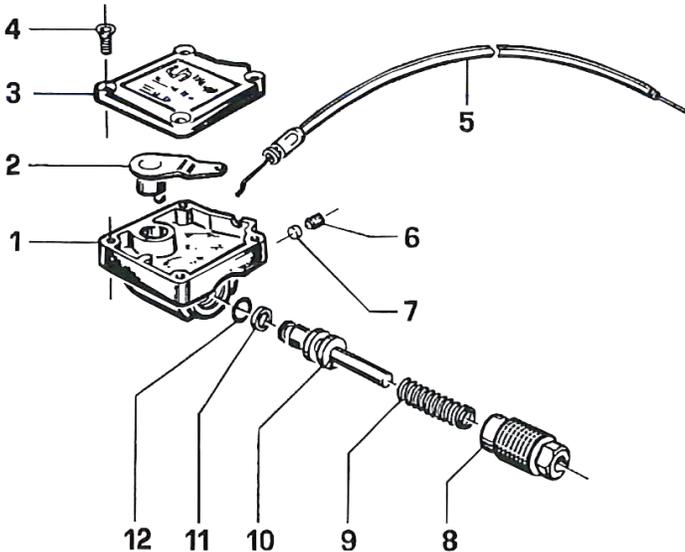


GENERAL PUMP *A member of the Interpump Group***Z-Speed**
Throttle Control**FEATURES****Speedmatic Adjustable Throttle Control**

The Speedmatic Adjustable Throttle Control is designed to reduce gas engine speed when pump is in bypass and immediately return to full operating RPM when pump operation resumes. Easy to install and simple to adjust, the Speedmatic saves wear on both the pump and the gasoline engine during interruptions in the cleaning process.

PARTS LIST**SPECIFICATIONS**

Part Number	ZSPEED
Maximum Operating Pressure	3,000 PSI
Minimum Operating Pressure	725 PSI
Maximum Temperature	140° F
Port Sizes: Inlet	3/8-19 BSP-M
Dimensions	2.72" x 2.12" x 1.44" With 42" Cable
Weight	1.0 lb.
Materials	Brass, Stainless Steel, Plastic

No.	Part Number	Description	Qty.
1	10044041	Body	1
2	10044502	Lever	1
3	10044151	Cover	1
4	99127200	Screw	4
5	10044601	Cable	1
6	99150700	Screw	1
7	10019262	Plug	1
8	10044770	Adjusting Screw	1
9	94734600	Spring	1
10	10044270	Piston	1
11	90502500	Anti-extrusion Ring	1
12	90357600	O-ring	1
13	540009	Cable Bending Tool (not pictured)	1

See reverse side for assembly
and use instructions.









General Pump
is a member of
the Interpump Group



Ref 300574 Rev B
06-15



INSTRUCTIONS FOR ASSEMBLY

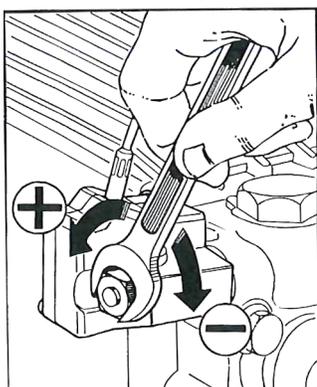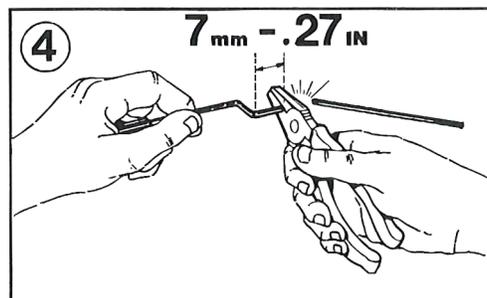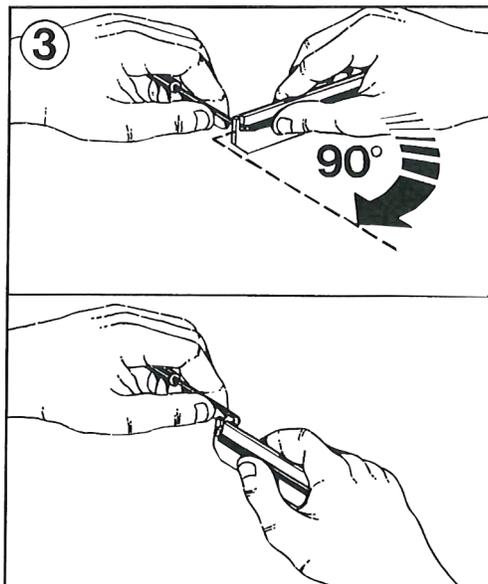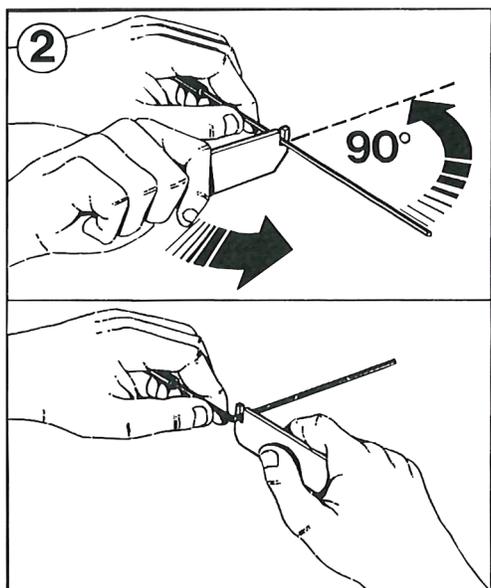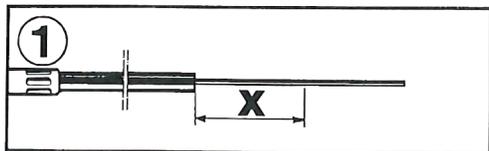

- The stroke can be adjusted from 0 - 30 mm (0 - 1.18 in.)