
Telescoping Wands



Professional fiberglass series DLTG12, DCLTG18, and DCLTG24

- Pole made of fiberglass and aluminum
- Use with hot or cold pressure washers
- Avalible in 12' (2-section), 18' (3-setions), and 24' (4-sections)
- Nozzle holder accepts standard quick couple spray nozzles
- 1/4" double-braid, 4000 PSI
- Exclusive General Pump Wand Belt, D20015 (sold separately)

Wand Model	DLTG12	DCLTG18	DCLTG24
Max Flow	10.5 GPM		
Max Pressure	4000 PSI		
Max Fluid Temp	195°F		
Gun Type	Normal Gun Compensating Gun		
Shipping Weight	9.2 lbs	11.6 lbs	14.2 lbs
Dimensions-Retracted	6.1"x7' 1/2"	6.1"x7' 5"	6.1"x7' 8"



Industrial aluminum series DCLTG18A and DCLYG24A4

- Extremely heavy-duty
- Industrial, 5/16" double-braid, 4000 PSI hose
- All aluminum, lightweight pole^o
- Use with hot or cold pressure washers
- 18 foot 3-section telescoping poles
- 24 foot 4-section telescoping poles
- Nozzle holder accepts standard quick couple
- Compensating gun included
- Pin-lock adjustments
- Includes D20015 General Pump Wand Belt

Wand Model	DCLTG18A	DCLTG24A4
Max Flow	10.5 GPM	
Max Pressure	4000 PSI	
Max Fluid Temp	195°F	
Gun Type	Compensating Gun	
Shipping Weight	13 lbs	16.5 lbs
Dimensions-Retracted	6.8"x6' 5"	6.8"x6' 8"

Soap Shooter

100169 - #3.5 100147 - #5.0 100145 - #4.0 100181 - #6.0 100146 - #4.5 101012 - #7.0

- For use with lance or extension wand
- Adjustable chemical feature
- Chemical flow can be stopped
- 5,000 PSI maximum
- Chemical does not go through pump
- Attaches to QC on lance or extension wand
- Stainless Steel
- Includes: 30' hose filter and nozzle



D20015 Wand Support Belt- Optional for the DLTG12, DCLTG12,


- and DCLTG24
- Reduces back, shoulder, and arm strain



GP Companies, Inc

1174 Northland Drive, Mendota Heights, MN 55120 Phone: 651.686.2199 Fax: 800.535.1745 www.generalpump.com email: sales@gpcompanies.com www.facebook.com/gpcompanies www.youtube.com/user/generalpump



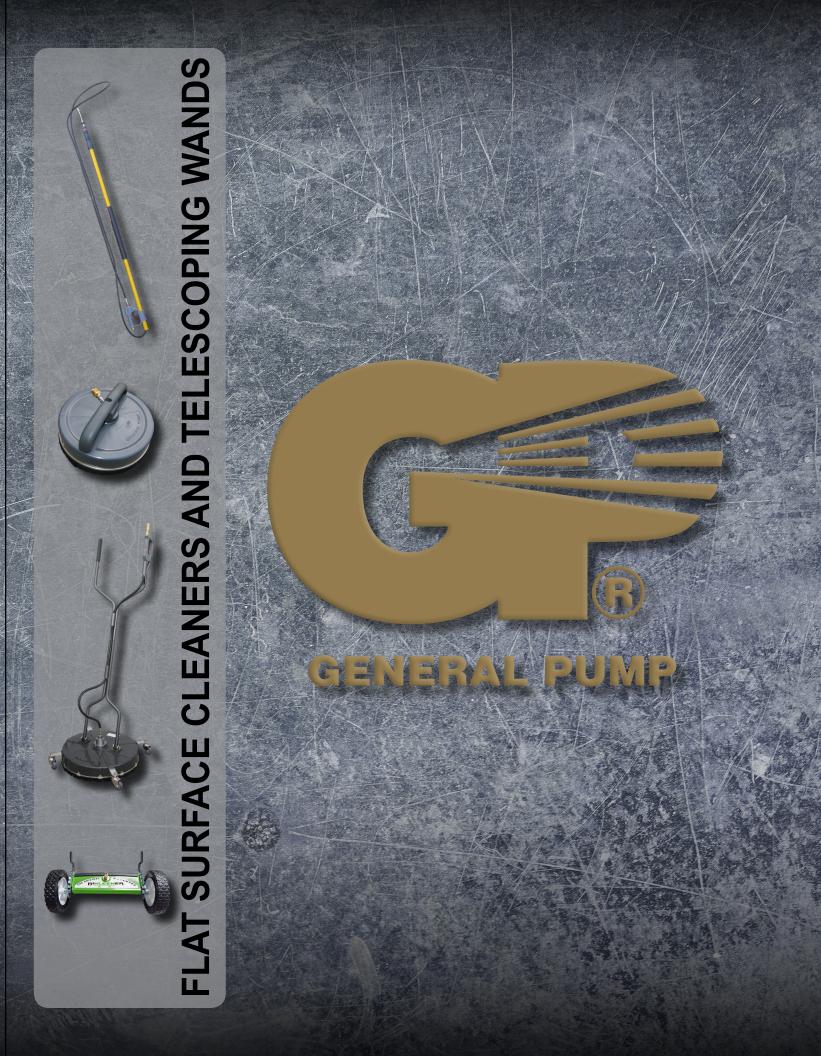

Flat Surface Cleaners





DCFSCP20GZ



FSC Model	DFSCP12E	DFSCP12		
Max Flow	4 GPM	6 GPM		
Operating Pressure	1000-3000 PSI	1500-3500 PSI		
Shipping Weight	2.4 lbs	4 lbs		
Dimensions-Retracted	12"x5.3"	12.7"x5.8"		

Economical DFSCP12E

- Full 12" cleaning path
- Can be connected directly to a gun, lance, or telescoping wand
- Brass and Stainless Steel construction
- Durable polypropylene deck
- Includes a 1/4" plug for connecting to 1/4" quick disconnect

Semi-Professional DFSCP12

- Full 12" cleaning path
- Can be connected directly to a gun, lance, or telescoping wand
- Lightweight, anodized aluminum components
- Durable polypropylene deck
- Includes a 1/4" plug for connecting to 1/4" quick disconnect
- SKF Stainless Steel bearing for long lasting

Professional Flat Surface Cleaners

DCFSCP18GZ, DCFSCP20GZ, and DCFSCP24GZ

- Compensating gun feature
- Full 18", 20", and 24" cleaning paths
- Heavy-duty anodized aluminum components
- Rugged ABS cover
- Swivel has grease zerk fitting for bearing lubrication
- Two Stainless Steel bearings for better performance
- Stainless Steel inlet filter for water filtration
- 24" supplied with 3-nozzle rotating arm
- Available with SKF sealed swivels

FSC Model	DCFSCP18GZ	DCFSCP20GZ	DCFSCP24GZ
Max Flow	8 GPM		
Operating Pressure	1000-4000 PSI		
Caster kit	Not Included		Included
Shipping Weight	17 lbs	21 lbs	23 lbs
Dimensions-Retracted	70"x18.3"x18.3"	70"x21"x21"	70"x25"x25"

Industrial Flat Surface Cleaners

DCFSCP24Z

DCFSCS22Z

- Compensating gun feature
- Full 22" cleaning path
- Heavy-duty anodized aluminum components
- Rugged Stainless Steel cover, handle, and casters
- Three nozzle rotating arm
- Swivel has grease zerk fitting for bearing lubrication
- Stainless Steel inlet filter for water filtration
- 24" supplied with 3-nozzle rotating arm
- Operating Pressure: 1,000 to 4,000 PSI
- Max Flow: 8.0 GPM
- Dimensions: 70"x23"x23"
- Weight: 24.5 lbs



DFSCGK Gun Cleaning Kit

- Works with all FSC shown above
- Kit includes Gun. Lance, and Ball Valve
- Use for quick spot cleaning
- Gun kit sold separately

Accessories for Flat Surface Cleaner



2103220 Swivel Swivel for the DCFSCP18GZ.



2103226 Swivel Swivel for the DCFSCS22Z. 20GZ, 24GZ flat surface cleaners Stainless Steel flat surface cleaner



2100372 Swivel Major Repair Repair kit for both swivels

2100200 Caster Kit

- Optional for DCFSCP18GZ and DCFSCP20GZ
- Stainless Sttel brackets

2103228 Caster Kit

- Replacement caster kit for DCFSCP24GZ and DCFSCS22Z





BiKleener Water Brooms

- Operating pressure: 2500 to 4500 PSI
- Quick disconnect to pressure washer wand
- 2 nozzles (2100473) and 3 nozzle (2100306)
- Upright operation saves back strain and fatigue
- Consistent and even cleaning path no zebra strips
- Cleaned area is easy to see and review
- Quick disconnect for easy storage
- 4 to 6 times faster, saving energy and water



Rotary Arm Assemblies

- 2530052: 2-nozzle rotary arm for 18" flat surface cleaner
- 2530009: 2-Nozzle rotary arm for 24" flat surface cleaner
- 2103288: 3-nozzles SS rotary arm for 24" flat surface cleaner
- 2103224: 3-nozzles SS rotary arm for 22" flat surface cleaner

