


DCG5010HE Compensating Spray Gun for Hydro Excavation

| SPECIFICATIONS | |
|--------------------------|---|
| Part Number: | DCG5010HE |
| Maximum Volume: | 10.5 GPM |
| Maximum Pressure: | 5000 PSI |
| Maximum Temperature: | 320 ^o F |
| Port Sizes: Inlet Outlet | 3/8" NPT-F 1/4" NPT-F |
| Dimensions: | 8.1" x 6.3" x 1.2" |
| Weight: | 1.4 lbs. |
| Material: | Brass, Stainless Steel, Plastic, Viton |
| REPAIR KIT | 2100249 |
| | |

FEATURES

- Specifically designed for use in hydro excavation!
- Exclusive patented GP design
- Unique design compensates for changes in pressure
- Trigger designed for low fatigue
- Allows for continued use without tiring hand
- All flow passages designed for minimum pressure drop maximum flow
- Fluorocarbon seals for maximum high temperature performance
- Large comfortable hand grip to accommodate work gloves
- Additional venting for excellent high temperature performance
- Durable glass-filled housing and trigger in Zytel (high tech nylon)








DCG5010HE Compensating Spray Gun

PARTS LIST

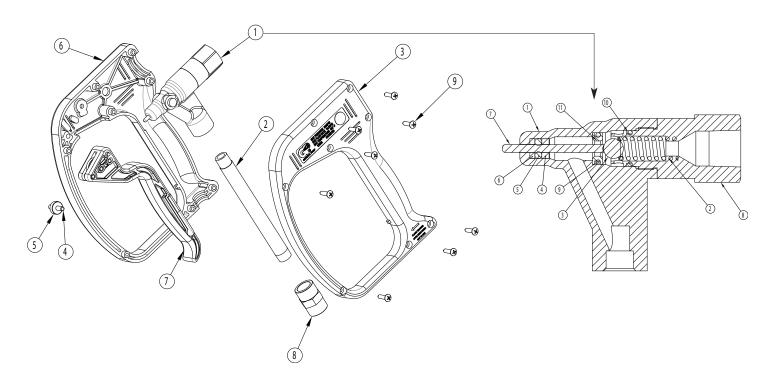

PARTS LIST FOR 2103290

| ltem | Part No. | Description | Qty. | 1 | 2452024 | FORGING | 1 |
|------|----------|---------------------|------|-----|---------|----------------|---|
| 1 | 2103290 | ASSY, SUB, FORGING | 1 | 2* | 2720001 | SPRING | 1 |
| 2 | 2550201 | TUBE, INLET, GUN | 1 | 3* | 2520004 | BALL | 1 |
| 3 | 2660323 | HOUSING, GUN, LEFT | 1 | 4* | 2510004 | WASHER, BRASS | 1 |
| 4 | 2510157 | PIN, TRIGGER | 1 | 5* | 2701048 | O-RING | 1 |
| 5 | 2520087 | ROLLER | 1 | 6* | 2710018 | WASHER, TEFLON | 1 |
| 6 | 2660322 | HOUSING, GUN, RIGHT | 1 | 7* | 2520084 | PIN, FORGING | 1 |
| 7 | 2103255 | ASSY, TRIGGER | 1 | 8 | 2510251 | PLUG, GUN | 1 |
| 8 | 2520060 | UNION | 1 | 9* | 2701002 | O-RING | 1 |
| 9 | 2200065 | SCREW | 8 | 10* | 2701049 | O-RING | 1 |
| | | | | 11* | 2520085 | SEAT, GUN | 1 |
| | | | | * | 2100249 | REPAIR KIT | |
| Item | Part No. | Description | Qty. | | | | |

* Repair Kit 2100249



Ref 300990 Rev A

