

FEATURES

- Pump is ready to use right out of the box
- ET Series Pump with 56C Electric Flange
- YVB3KA Unloader, 3200 PSI, 6.5 GPM
- 3/8" Quick Coupler and 3/8" Plug Included
- 3/4" Garden Hose Inlet Fitting with 1/4" Side Port
- 3/8" Hose Barb and Clamp Keeps Hose Secure and Sealed
- General Pump recommends installing a secondary relief and pressure gauge






SPECIFICATIONS

Pump Model	PMRET1509E17	PMRET1809E17	PMRET1505E34	PMRET1506E34	PMRET1507E34
Maximum Volume	2.1 GPM	3.2 GPM	2.1 GPM	2.9 GPM	3.2 GPM
Maximum Discharge Pressure	2610 PSI	2320 PSI	2610 PSI		
Maximum Pump Speed	1700 RPM		3400 RPM		
Maximum Inlet Pressure	125 PSI				
Maximum Inlet Vacuum	3 ft. water (2.6 in. Hg)				
Plunger Bore	.591 in. / 15 mm	.708 in. / 18 mm	.591 in. / 15 mm		
Plunger Stroke	.370 in./9.4 mm		.197 in./5 mm	.256 in./6.5 mm	.238 in./7.2 mm
Crankcase Oil Capacity	8.5 oz.				
Maximum Fluid Temperature	165° F				
Inlet Port Thread	1/2-14 BSP-F				
Discharge Port Thread	3/8-19 BSP-F				
Shaft Diameter	5/8" Hollow				
Weight	14.0 lbs.				
Dimensions	13" x 10.5" x 5.5"				

DIMENSIONAL DRAWING

HOSE CLAMPS TO BE
1/8" TO 1/4" FROM END
OF HOSE

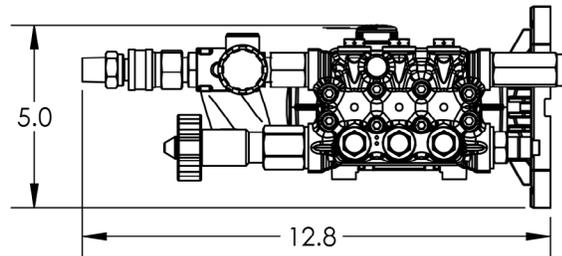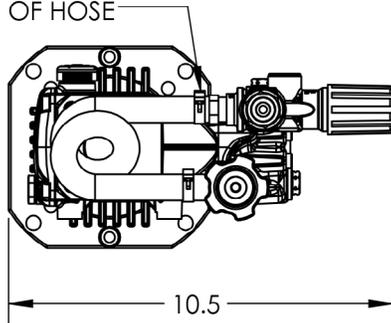

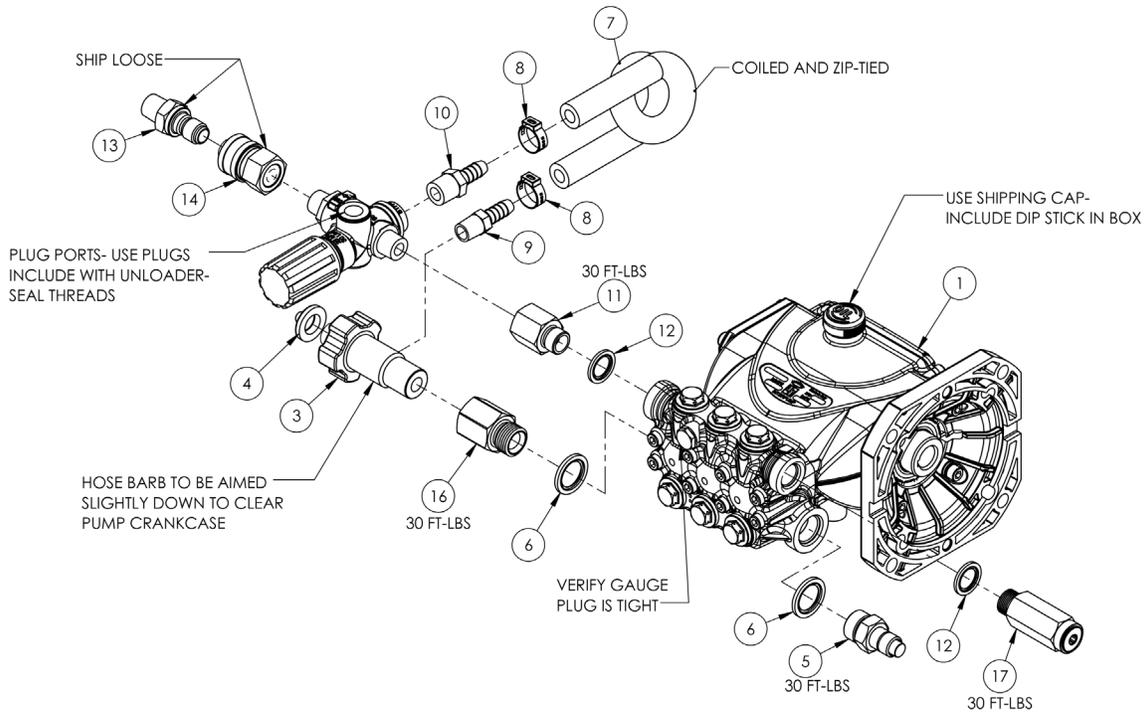

PARTS LIST

Item No.	Part No.	Description	QTY.
1.	ET1509E17	Pump, ET, 56C, 5/8" Hollow Shaft, 2.1 GPM, 2610 PSI, 1700 RPM	1
	ET1809E17	Pump, ET, 56C, 5/8" Hollow Shaft, 3.2 GPM, 2320 PSI, 1700 RPM	
	ET1505E34	Pump, ET, 56C, 5/8" Hollow Shaft, 2.1 GPM, 2610 PSI, 3400 RPM	
	ET1506E34	Pump, ET, 56C, 5/8" Hollow Shaft, 2.9 GPM, 2610 PSI, 3400 RPM	
	ET1507E34	Pump, ET, 56C, 5/8" Hollow Shaft, 3.2 GPM, 2610 PSI, 3400 RPM	
2.	YVB3KA	Unloader, 6.5 GPM, 3200 PSI, NPT	1
3.	680017WO	Inlet Fitting Assy, Long, 1/2" NPT, 1/4" Port,	1
4.	D10018	Filter Washer	1
5.	2100612MB	Valve, PTP, 1/2" BSPP-M 140-151 Deg, 145 PSI	1
6.	680110	Seal Ring, 1/2" BSPP	2
7.	639387	Hose, 3/8" ID, 250 PSI BLK, 2 FT	1
8.	639897	Hose Clamp, Crimp Type, 39/64" to 47/64", 9/32" WD	2
9.	638147	3/8" Hose Barb x 1/4" NPT	1
10.	638148	3/8" Hose Barb x 3/8" NPT	1
11.	680266	Adapter, 3/8" BSPP-M x 3/8" NPT-F, Steel, 5500 PSI	1
12.	680029	Washer, Face Seal, 3/8" BSP	2
13.	D11009	Plug, 3/8" QC x 3/8" NPT-M, Zinc Plated Steel, Hardened	1
14.	D10003	Coupler, 3/8" QC A 3/8" NPT-F	1
15.	400128	Warning Label, Prop 65, 1.5" x.25" WD	1
16.	639385	Fitting, 1/2" F-NPT x 1/2" BSPP	1
17.	10113632	ASSY, SRV, 3/8" BSPP-M End Discharge, Preset 3200 PSI	1

WARNINGS

WARNING: High Pressure Systems require a primary pressure regulating device (i.e. regulator, unloader) and a secondary pressure relief device (i.e. pop-off valve, relief valve). Failure to install such relief devices properly could result in personal injury or damage to pump or property. GP does not assume any liability or responsibility for the operation of the user's high pressure system.

-  During use, never exceed the maximum values of pressure, flow rate and temperature as stated in this document.
-  Maintenance and repair must be carried out by qualified and authorized staff only. Replace the filter parts with original spare parts only.
-  From time to time, it is necessary to check that the parts which are under pressure do not show cracks and/or leakages; the frequency of this check depends on the actual use. Inspect and clean the screen regularly.



WARNING: This product can expose you to chemicals, including lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov