

A downstream injector for low-pressure chemical applications. Features an adjustable metering knob. Use in conjunction with a double lance, adjustable nozzle, or other means of changing to low pressure while retaining system's output flow.




### SPECIFICATIONS

Part Number:	Volume
ZROBO 0 B	2.1 - 2.9 GPM
ZROBO 1 B	2.9 - 4.0 GPM
ZROBO 2 B	4.0 - 5.6 GPM
ZROBO 3 B	6.6 - 10.8 GPM
Maximum Pressure	3,200 PSI
Maximum Temperature	210° F
Port Sizes: Inlet/Outlet	3/8" BSP-M
Dimensions	1.0" x 2.7" x 3.1"
Weight	.8 lbs.
Materials	Brass, Stainless Steel, Viton, Buna-N

### DIMENSIONS

Item	Part #	Description	Kit	QTY
1	10007870	Nipple, Ø .881" (3 mm) Robo 0, 1, 2		1
	10016070	Nipple, Ø .881" (3 mm) Robo 3		1
2	90383200	O-ring, .549 x .103	*	1
3	10015166	Nozzle, Ø .079 (2 mm), Robo 0		1
	10007666	Nozzle, Ø .087 (2.2 mm), Robo 1		1
	10007766	Nozzle, Ø .098 (2.5 mm), Robo 2		1
	10016266	Nozzle, Ø .108 (2.75mm), Robo 1		1
4	701614	O-ring, .391 x .103	*	1
5	10038941	Body		1
6	94821700	Spring, Ø 4.3/7.3 x 11	*	1
7	97478200	Ball, Ø 7.32"	*	1
8	701501	O-ring, Ø .208 x .070	*	1
9	10038870	Hose Barb/Seat		1
10	701016	O-ring, Ø .614 x .070	*	1
11	701612	O-ring, Ø .44 x .070	*	1
12	510010	Adjustment Knob, Plastic		1
*	190000	REPAIR KIT		

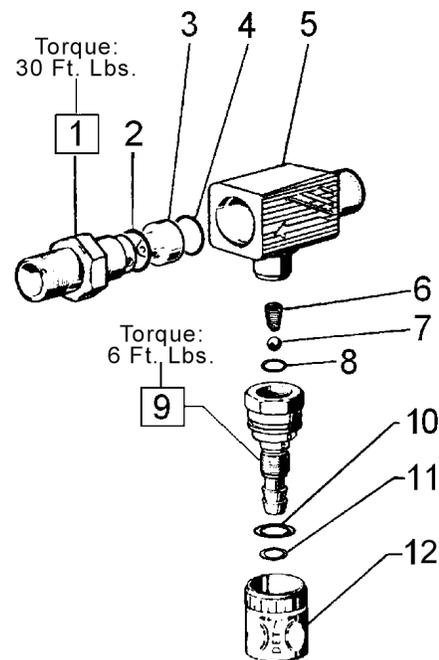

General Pump is a member of the Interpump Group

Ref 300100 Rev. C  
06-14




# ZROBO

## ROBOKIM chemical Injector

**GENERAL PUMP** *A member of the Interpump Group*

### INSTALLATION / SET-UP

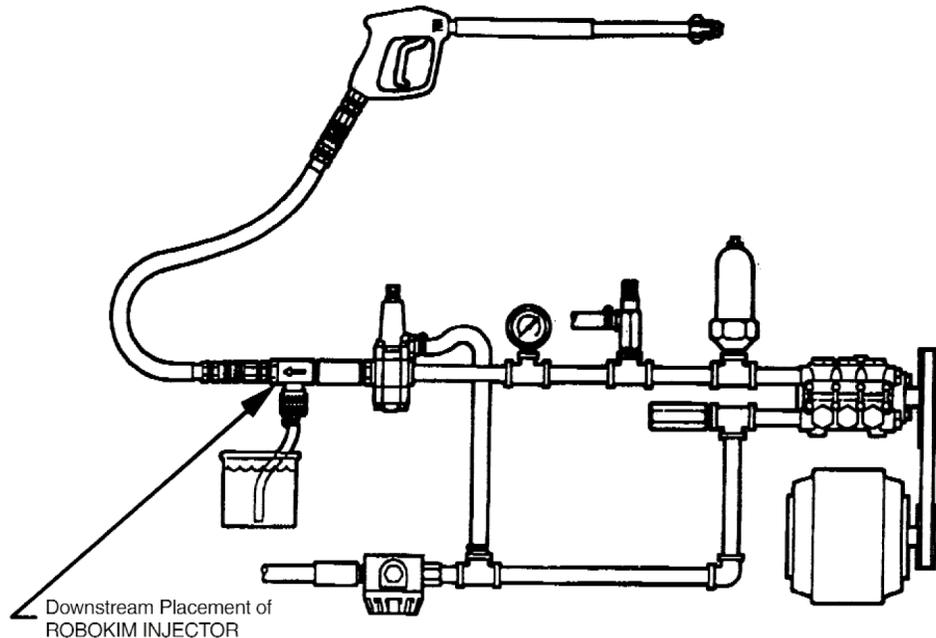

Be sure that this accessory as well as all other components exceeds the system's maximum pressure rating. The system's output flow must be within the volume specification of this chemical injector for proper system operation and acceptable back pressure.

Refer to the arrow on the injector valve body for proper flow direction. Install the injector in the system downstream of the regulator unloader which is downstream of the pump. Use the 3/8" male inlet/outlet threads for mounting. Attach a piece of 516" ID tubing to the chemical inlet hose barb. Be sure that the tubing you select is compatible with the chemicals you will be using. Be sure to install an appropriate filter on the tubing.

A spray tip or nozzle must be selected to produce 125 PSI or less at system's output volume. A double lance, twin nozzle holder or adjustable nozzle may be used for easy switching from high to low pressure.

These injectors will draw your chemical into the water stream at 125 PSI and 2.1 to 10.8 GPM (through your low pressure spray tip) and will not draw chemical above 250 PSI (through your high pressure spray tip). The amount of chemical being drawn in is controlled with the adjustment knob (item 12).

Ref 300100 Rev. C  
06-14

**GENERAL PUMP** 1174 Northland Drive • Mendota Heights, MN 55120  
Phone: 651.686.2199 • Fax: 800.535.1745 • e-mail: sales@gpcompanies.com • www.generalpump.com

