The Complete "M" Series









General Pump proudly presents a line of plunger pumps designed for handling a variety of muds. The line includes 4 (four) different power frames covering a wide range of flow rates up to 105 gpm and pressures up to 1300 psi.

Available gear boxes and hydraulic drive options for most models.

	MODEL	VALVE TYPE	SLEEVE MATERIAL	RPM	FLOW	VOLUME DISPLACEMENT	PRESSURE	HP
ê	KT45M	Ball	Ceramic	600	19.6 GPM	0.033 Gal/Rev	750 PSI	9.6
	KF5M 5B	Ball	Ceramic	600	46.7 GPM	0.078 Gal/Rev	750 PSI	23.0
	KF5M 9B	Ball	Steel	600	46.7 GPM	0.078 Gal/Rev	1,160 PSI	36.8

	MODEL	VALVE TYPE	SLEEVE MATERIAL	GEARBOX RPM				FLOW	VOLUME DISPLACEMENT	PRESSURE	НР
				1:1.875	1:2.238	1:2.722	1:3.211				
	MF7M 5B	Ball	Ceramic	410	490	590	700	53.3 GPM	0.245 Gal/Rev	750 PSI	26.2
	MF7M 5D	Disc	Ceramic	520	620	750	880	67.1 GPM	0.245 Gal/Rev	750 PSI	33.0
	MF7M 7B	Ball	Steel	410	490	590	700	53.3 GPM	0.245 Gal/Rev	1090 PSI	39.4
	MF7M 7D	Disc	Steel	520	620	750	880	67.1 GPM	0.245 Gal/Rev	1090 PSI	49.5

MODEL	VALVE TYPE	SLEEVE MATERIAL	GEARBOX RPM				FLOW	VOLUME DISPLACEMENT	PRESSURE	НР
			1:1.61	1:2.22	1:2.65	1:3.29				
MK9M 5B	Ball	Ceramic	470	650	770	950	105.0 GPM	0.363 Gal/Rev	750 PSI	51.6
MK9M 5D	Disc	Ceramic	470	650	770	950	105.0 GPM	0.363 Gal/Rev	750 PSI	51.6
MK9M 8B	Ball	Steel	470	650	770	950	105.0 GPM	0.363 Gal/Rev	1090 PSI	82.5
MK9M 8D	Disc	Steel	470	650	770	950	105.0 GPM	0.363 Gal/Rev	1090 PSI	82.5

Our mission:

To be the best fluid control device company worldwide, providing our customers with superior and innovative products, coupled with a level of service that exceeds customer expectations.

At GP Companies, Inc.: "We'll find a Way!"















Distributed By




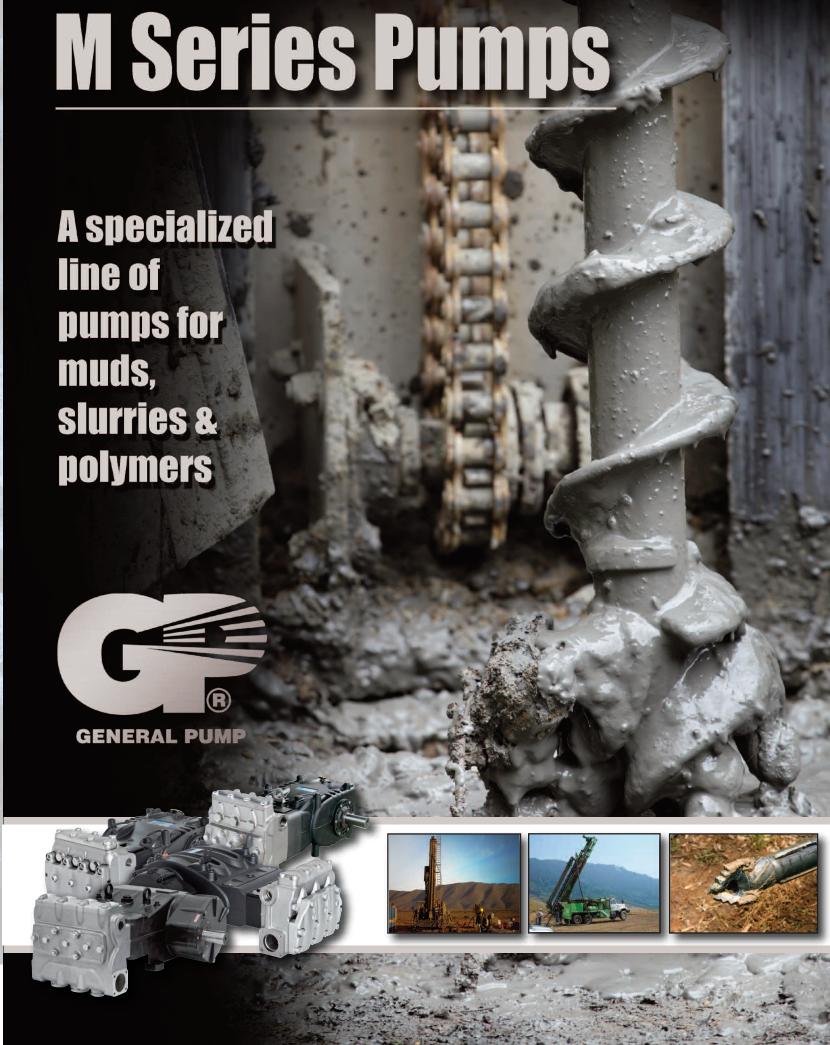

General Pump's "M" Series are spefically designed for handling fluids and muds typical of the drilling industry. This innovative pump line combines years of testing with the latest in technological advances to provide modern pumping solutions for any drilling task.

FEATURES & BENEFITS

- Nickel-plated manifold
- · Self cleaning ball valves or disc style valves
- **Kevlar impregnated packings**
- High heat dissipation power end




Packings feature the latest technology. **Materials include** kevlar and rubber.





- Splash lubricated gear end
- **Quick servicing of packings** (patent pending)
- Auxiliary PTO shaft available as an option (not available on MK9M)





AVAILABLE OPTION:

ZGPM1 Tach Sensor Inductive proximity sensor, includes female connector M12, 4 pin, field attachable, ring nut reduction M18 x 1. 12/24 VDC






The M Series is designed to work with negative heads of 10 FEET and speeds as slow as 100 rpm

EASY MAINTENANCE

Traditionally maintenance can be a difficult task when plumbing is complicated or space is limited. The "M" Series packings are accessible from the front of the pump and easily changed in minutes without removing the manifold

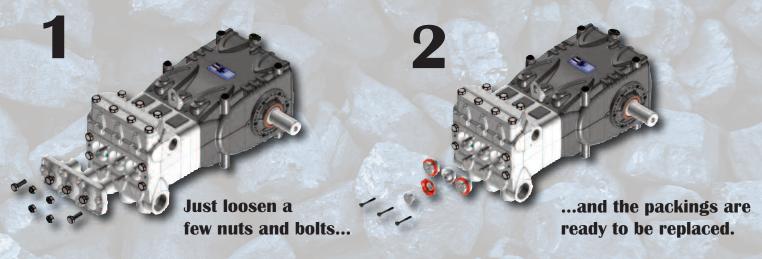

DRIVE OPTIONS

KT45M



SAE B 2/4F 13T 16/32DP



KF5M

SAE B or C 2/4F 14T 12/24DP



SAE C 4F 14T 12/24DP



SAE C 4F 14T 12/24DP **SAE D 4F 13T** 30°8/16 DP

HYDRAULIC MOTORS AVAILABLE UPON REQUEST



SAE B & C Flange w/ Coupler



Attached Gearbox (KF5M only)



DIN



Aux. PTO Drive (Not available on MK9M)