


ETB Series

Triplex Plunger Pump, Electric

FEATURES

- Durable forged brass manifold
- Dust protection chamber
- Solid ceramic plungers
- Advanced plunger mounting system
- Valve cover for ease of service
- NEMA 56C flange, 5/8" hollow shaft

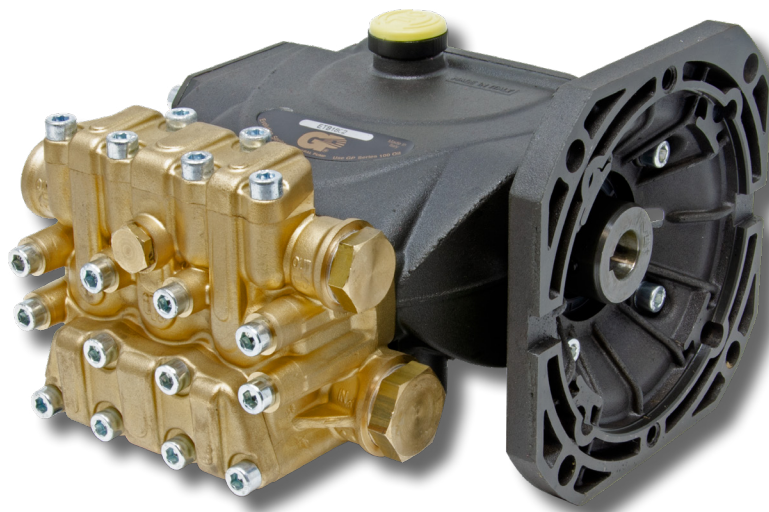

SPECIFICATIONS

Pump Model	ETB1502E175	ETB1802E175	ETB1509E175	ETB1809E175	ETB1504E345	ETB1505E345	ETB1506E345	ETB1507E345
Max Volume	0.25 GPM	0.50 GPM	2.1GPM	3.2 GPM	1.75 GPM	2.13 GPM	2.93 GPM	3.2 GPM
Max Discharge Pressure	2500 PSI	2200 PSI	2610 PSI	2320 PSI	2610 PSI			
Horsepower	0.5 EBHP	0.8 EBHP	3.6 EBHP	3.6 EBHP	3.2 EBHP	3.9 EBHP	4.8 EBHP	5.5 EBHP
Max Pump Speed	1750 RPM				3400 RPM			
Inlet Pressures	Flooded to 70 PSI							
Plunger Bore	.591 in./15 mm	.709 in./18 mm	.591 in./15 mm	.708 in./18 mm	.591 in./15 mm			
Plunger Stroke	.079 in./2.0 mm	0.79 in./2.0 mm	.370 in./9.4 mm	.370 in./9.4 mm	.157 in./4 mm	.197 in./5 mm	.256 in./6.5 mm	.283 in./7.2 mm
Oil Capacity	8.5 oz.							
Max Fluid Temperature	165° F							
Inlet Port Thread	1/2"-14 BSP-F							
Discharge Port Thread	3/8"-19 BSP-F							
Shaft Diameter	5/8" Hollow							
Weight	11.0 lbs.							
Dimensions - Nominal	7.3" x 7.4" x 5.5"							



Instructions and Recommendations for the Installation of *ETB Series Pumps*

Maximum temperature of the water through the pump is 165°F (73°C).

In order to obtain maximum performance in terms of duration of seals and valves, it is necessary to respect a few simple rules, as follows:

- 1) **In order to avoid damage caused by cavitation, the pump must be pressure fed.**

Note: Contact General Pump's technical sales department for guidance when operating the pump outside of the related inlet specs.

- 2) **The plumbing which feeds the pump must be of a diameter at least equal to the inlet port.**

Also, follow the suggestions below:

- a) Make the plumbing as short and straight as possible, preferably in an upward direction to facilitate the expulsion of eventual air bubbles naturally if compatible with the requirements of the system.
- b) It is always useful to put a filter at the inlet with capacity of 4 to 5 times the flow of the pump, for example for a 4 gpm (15 l/min) pump, put a filter from 16 to 20 gpm (60-75 l/min). The mesh size suitable for this application is 0.016" (.4 mm).
- c) It is extremely important to put a pressure switch on the suction port of the pump, and in any case downstream from the filter, so that it can stop the pump should the feed pressure drop by 20% due to the filter clogging or failure of the feed pump, etc.

3) Change of oil

We recommend the **first oil change after the first 50 hours**, with the **pump stopped** and the **oil still warm**.


This change is not recommended because the oil has lost its properties, but rather to eliminate the impurities that have gotten into the oil during the running-in phase. If these impurities are not removed, but are allowed to remain in the oil, they *may cause premature wear* to the moving parts and the oil seals. **After this initial change, the oil can then be changed every three months or 300 hours of operation thereafter.**

Please note: If the pump works in conditions with high humidity and with sharp temperature changes, it is possible that condensation will appear inside the crankcase, which mixing with the oil can change its properties. This is easy to see because the oil changes to a white, milky color.

If the pump does not have excessive water leaking from the packings, and the oil becomes milky, the oil has to be changed more frequently. The percentage of water in the oil must not exceed 20%.

Use oil per the following chart:

CHART OF COMPATIBLE OILS	
General Pump	Series 100
BP	VISCO 2000
CASTROL	CWX
MOBIL	SUPER
SHELL	HELIX SUPER
TOTAL	QUARTZ 4000-5000

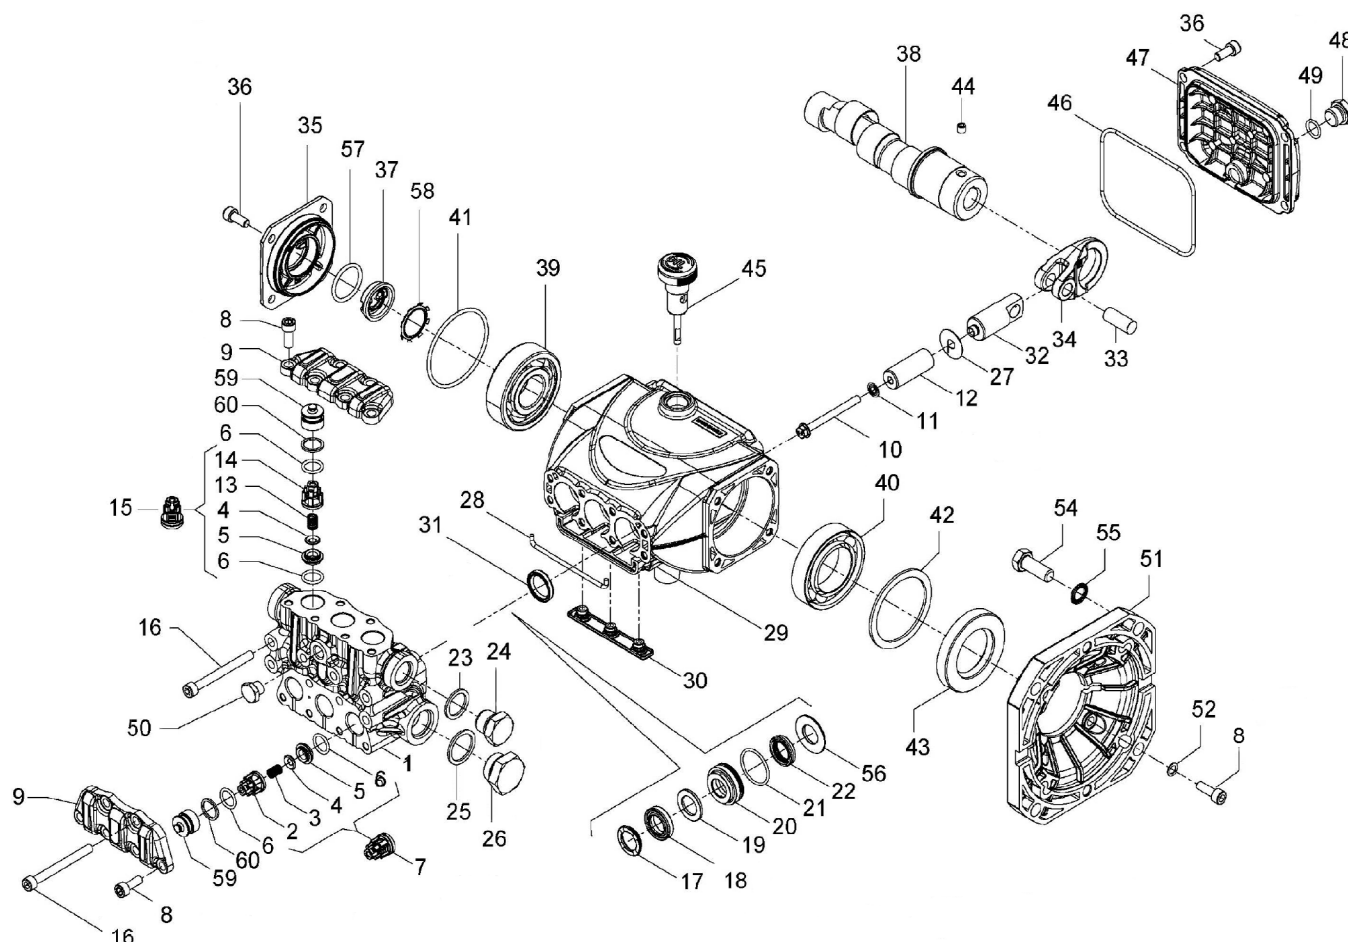

PARTS LIST

ITEM	PART NO.	DESCRIPTION	QTY	ITEM	PART NO.	DESCRIPTION	QTY	ITEM	PART NO.	DESCRIPTION	QTY
1.	53122941	Manifold, Ø 15	1	21.	90360400	O-ring, Ø25.12x1.78	3		60022965	Crankshaft, Ø 7.2 (ETB1507E345)	1
	53123041	Manifold, Ø 18	1	22.	90260800	Packing, Ø15x22x5, LP	3		60023465	Crankshaft, Ø 9.4 (ETB1509E175, ETB1809E175)	1
2.	36211951	Inlet Valve Guide	3		90265000	Packing, Ø18x24x5, LP	3	39.	91832800	Bearing Ø15-18	1
3.	94732600	Spring, Ø 6x12	3		710030	Plug, 3/8"x13	3	40.	91846400	Bearing Ø15-18	1
4.	36211276	Valve, Spherical	6	23.	96738000	Washer, Ø17.5x23x1.5	1	41.	90389800	O-ring, Ø56.82x2.62	1
5.	36211366	Valve Seat	6	24.	98210000	Plug, 3/8"x13	1	42.	60210189	Spacer	1
6.	90367400	O-ring, Ø12x2	12	25.	96751400	Washer, Ø 21.5x27x1.5	1	43.	90167500	Stop Ring Ø35x62x10	1
7.	36722401	Valve Assembly	3	26.	98217600	Plug, G1/2"x10	1	44.	99179000	Screw M6x06	1
8.	99186700	Screw, M8x18	10	27.	96699000	Gasket, Ø 7.5x23x0.5	3	45.	98210800	Oil Dipstick G 3/8"x45	1
9.	53212015	Valve Cover	2	28.	53210382	Gasket, Ø3x85	1	46.	90391700	O-ring, Ø88.57x2.62	1
10.	99169000	Plunger Bolt, M5x55	3	29.	53010022	Crankcase	1	47.	53160022	Rear Cover	1
11.	96690500	Washer, Ø 5x11.5x0.4	3	30.	58210451	Drip Cover	1	48.	98204250	Plug, 3/8"x9	1
12.	53040009	Plunger, Ø 15x38.5	3	31.	90159300	Oil Seal, Ø 18x24x4	3	49.	701013	O-ring, Ø 10.82x1.78	1
	63040509	Plunger, Ø 18x38x8.5	3	32.	53050066	Piston Guide	3	50.	98196600	Plug, 1/8"x8	1
13.	94733300	Spring, Ø 6.2x10.4	3	33.	97733800	Piston Pin, Ø 10x26.5	3	51.	10034422	Flange for Electric Motor	1
14.	36211151	Outlet Valve Cage Guide	3	34.	53030022	Connecting Rod	3	52.	96693800	Washer Ø6.4x10x0.7	4
15.	36719301	Complete Outlet Valve	3	35.	53150022	Side Cover Housing	1	54.	99334500	Screw 3/8"x16	4
16.	99199600	Screw, M6x70	8	36.	99183700	Screw M6x14	8	55.	96710400	Washer Ø 10.5x16x1	4
17.	63101051	Head Ring, Ø 15	3	37.	53210851	Oil Level Indicator	8	56.	53210670	Support Ring, Ø 15	3
	63101151	Head Ring, Ø 18	3	38.	60028065	Crankshaft, Ø 2.0 (ETB1502E175, ETB1802E175)	1		53210770	Support Ring, Ø 18	3
18.	90261100	Packing, Ø15x24x5.4/3.4HP	3		60022265	Crankshaft, Ø 4.0 (ETB1504E345)	1	57.	90385900	O-ring Ø 25.07x2.62	1
	90265350	Packing, Ø18x28x6/3.7HP	3		60022465	Crankshaft, Ø 5.0 (ETB1505E345)	1	58.	90067100	Stop Ring	1
	710031	Packing, Ø15, HP (K312H, K313H)	3		60022765	Crankshaft, Ø 6.5 (ETB1506E345)	1	59.	36217851	Inlet/Outlet Valve Cap	6
19.	90508990	Anti-ext. Ring, Ø15x24x2	3					60.	90509300	Stop Ring, Ø 16.4x13.2x1.3	6
	90511150	Anti-ext. Ring, Ø18x28x2	3								
20.	53210170	Support Ring, Ø 15	3								
	53210270	Support Ring, Ø 18	3								

* 53150001 Oil Level Indicator Assembled W/O Screws and O-ring

REPAIR KITS

KIT NO.	K309	K311	Ø 15				Ø 18	
			K312	K312H ¹ (Hot Kit)	K313	K313H ¹ (Hot Kit)	K314	K315
ITEM NO'S INCLUDED IN KIT	2, 3, 4, 5, 6, 13, 14, (7), (15)	31	17, 18, 19, 21, 22	18, 22	17, 18, 19, 20, 21, 22, 56	17, 18, 19, 20, 21, 22, 56	17, 18, 19, 21, 22	17, 18, 19, 20, 21, 22, 56
NUMBER OF ASSY'S IN KIT	6	3	3	3	1	3	3	1
NO. OF CYLINDERS KIT SERVICES	3	3	3	3	1	3	3	1

¹ Note: Seal tools included


TORQUE SPECS*

Position	Ft.-Lbs.	Nm.
8	7.4	10
10	4.4	6
16	8.9	12
24**	30	40
26	30	40
36	7.4	10
48	14.8	20
50**	9.6	13

*Decrease torque by 20% if threads are lubricated.

**Use Loctite 542 Red

DIMENSIONS

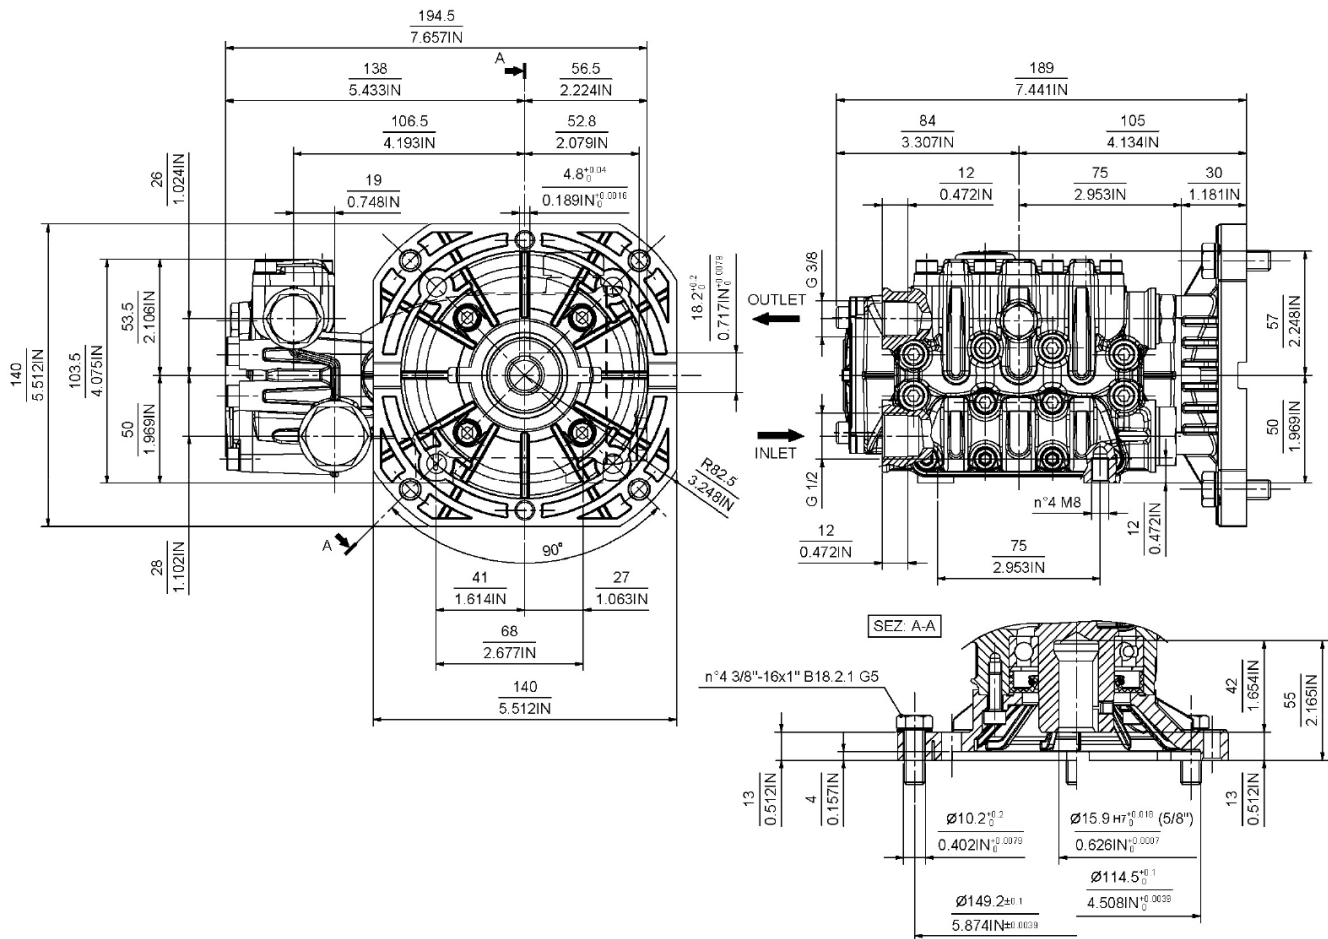

WARNING: High Pressure Systems require a primary pressure regulating device (i.e. regulator, unloader) and a secondary pressure relief device (i.e. pop-off valve, relief valve). Failure to install such relief devices properly could result in personal injury or damage to pump or property. GP does not assume any liability or responsibility for the operation of the user's high pressure system.



WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov