

FEATURES

- The preferred pump frame in the pressure cleaning industry
- Nickel plated forged brass manifold
- Large-capacity, die-cast, anodized aluminum oil-bath crankcase
- Over-sized connecting rods for maximum life
- Heavy-duty tapered roller bearing
- Solid ceramic plungers with continuously lubricated packings
- Unitized stainless steel inlet and discharge valves
- Designed for suction applications
- Manifold with coarse thread valve caps

**SPECIFICATIONS**

Pump Model	TS2013
Maximum Volume	5.5 GPM
Maximum Discharge Pressure	3000 PSI
Maximum Pump Speed	1750 RPM
Inlet Pressures	Flooded to 70 PSI
Plunger Bore	.787 in. / 20 mm
Plunger Stroke	.512 in. / 13 mm
Crankcase Oil Capacity	37.2 oz.
Horsepower	11.3 EBHP
Maximum Fluid Temperature	165° F
Inlet Port Thread	1/2-14 BSP-F
Discharge Port Thread	3/8-19 BSP-F
Shaft Diameter	.945 in. / 24 mm
Weight	32 lbs.
Dimensions	12.6" x 9.2" x 6.9"

TRIPLEX

TRIPLEX




General Pump
is a member of
the Interpump Group



Ref 300905 Rev. G
10-24



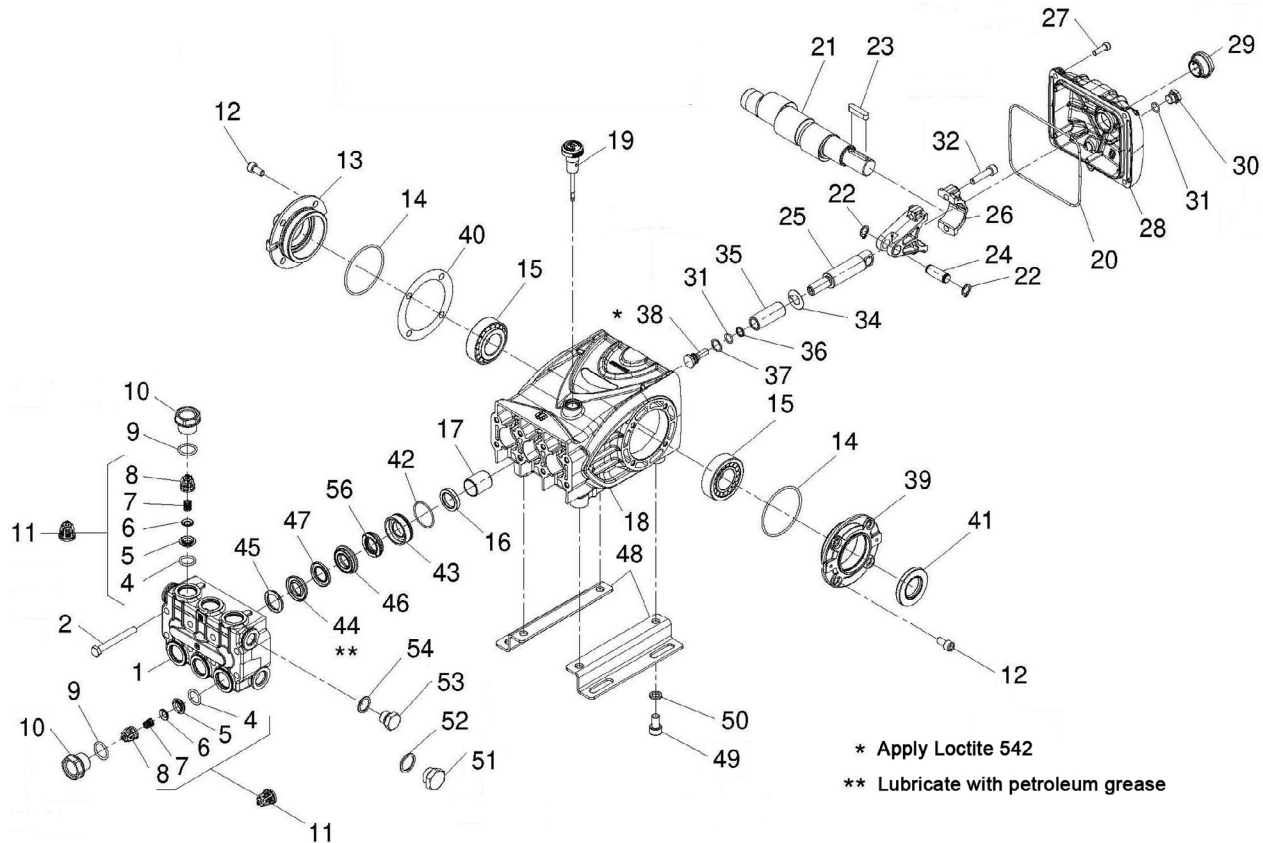

PARTS LIST

No.	Part No.	Description	Qty.	No.	Part No.	Description	Qty.	No.	Part No.	Description	Qty.
1.	47120241	Manifold, Ni. Plt.	1	20.	90392200	O-ring, Cover	1	39.	47151022	Cover, Crankcase	3
2.	99320600	Screw, M8 x 70	8	21.	47023035	Crankshaft	1	40.	97567800	Shim	2
4.	90384100	O-ring, Ø17.13 x 2.62	8	22.	90055700	Ring, Snap	6	41.	90164800	Seal, Oil	1
5.	36200366	Seat, Valve	6	23.	640048	Key	1	42.	90361600	O-ring, Ø34.65 x 1.78	3
6.	36200176	Plate, Valve	6	24.	97738000	Pin, Wrist	3	43.	47080570	Retainer, packing	3
7.	94737600	Spring	6	25.	47050466	Guide, Plunger	3	44.	90270500	Packing	3
8.	36200251	Guide, Valve	6	26.	47030001	Connecting Rod	3	45.	47100051	Ring, Head, M20	3
9.	90384700	O-ring, Ø20.29 x 2.62	6	27.	99188400	Screw, M6x20	5	46.	47216970	Intermed. Ring	3
10.	98222200	Cap, Ni. Plt (TSS2021)	6	28.	47160622	Cover, Crankcase	1	47.	90270400	Restop Ring	3
11.	36703201	Valve Assembly	6	29.	47221301	Oil Indicator	1	48.	47200074	Pump Feet	2
12.	99303900	Screw, M8 x 16	8	30.	98204250	Plug	1	49.	99364400	Screw, M10 x 18	4
13.	47150122	Cover, Crankcase	1	31.	90358500	O-ring, 10.82 x 1.78	4	50.	96710600	Washer, M10.2	4
14.	9039300	O-ring, Ø67.95 x 2.62	2	32.	99309900	Screw, M8 x 35	6	51.	98217600	Cap	1
15.	640047	Bearing, Roller	2	34.	96728600	Washer, M14	3	52.	96751400	Washer, M21.5	1
16.	90162500	Seal, Oil, Ø22 x 32 x 2.5	3	35.	47040409	Plunger, 20 mm	3	53.	98210000	Cap	1
17.	90912600	Bushing, Ø22 x 25 x 30	3	36.	90506700	Ring, Back-up	3	54.	96738000	Washer, M17.5	1
18.	47010822	Crankcase	1	37.	96728000	Washer	3	56.	90271000	Seal, Low Press, 20 mm	3
19.	98210600	Oil Dip Stick	1	38.	47219566	Screw, Plunger	3				

GENERAL PUMP